


mind330 m3-19


Digital Power BTE with Dual ISP



mind330 is based on the exclusive Widex Integrated Sound Processing platform - Dual ISP

Moderate to severe-to-profound hearing losses

Suggested fitting range

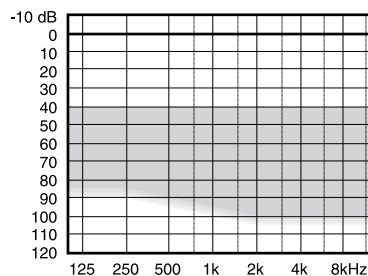

Dual Integrated Signal Processing

- Dual layer integration of knowledge and performance
- Dynamic Integrator™
- Listening layer
- Awareness layer
- 10 frequency bands
- 10 compression channels

Main listening features

- HD Locator™
- Audibility Extender™
- Multi-directional Active Feedback Cancelling
- TruSound™ compression system with EDRC
- Noise reduction

Main awareness features

Zen fractal generator

- Fractal computation
- Melody composition

Signal integrity

- DAI auto-detect
- High definition program handling

Speech and sound synthesis

- SmartSpeak™ generator
- SmartTone generator

Hearing aid characteristics


- Optional remote control
- Optional volume control
- Program button
- Telecoil
- LED indication

mind330 m3-19

Maximum output - Ear simulator

IEC 60118-0


Output dB SPL

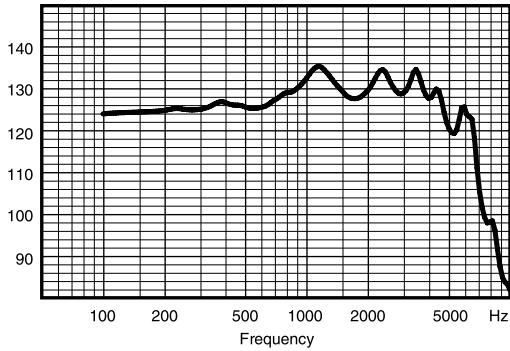

Maximum output - 2cc coupler

IEC 60118-7 / ANSI S3.22-2003


Output dB SPL

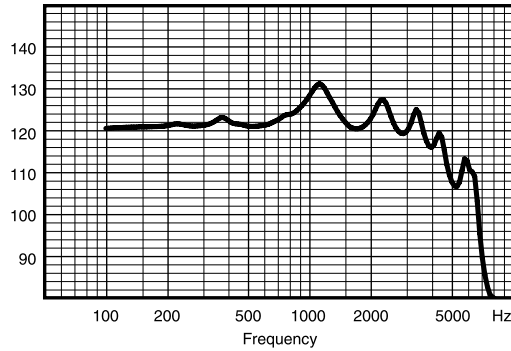

Output - Ear simulator

IEC 60118-0


Output dB SPL

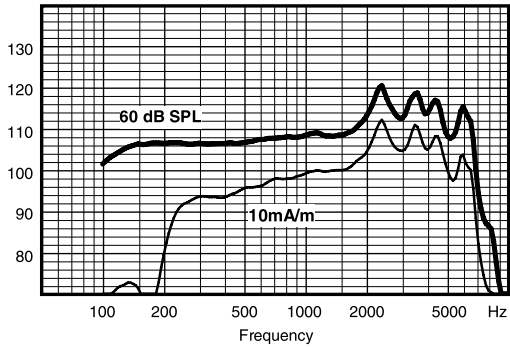

Output - 2cc coupler

IEC 60118-7 / ANSI S3.22-2003

Output dB SPL

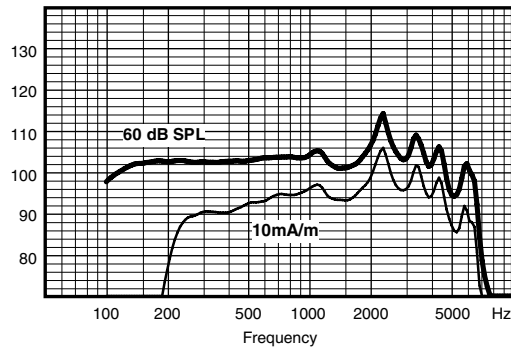

Technical data

Typical data obtained through standard pure tone measurements.
Hearing aid set to Compass Test mode 1, unless stated otherwise.
Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2003 / IEC 60118-7
OSPL90	2500 Hz	133 dB SPL	124 dB SPL
	Peak	136 dB SPL	131 dB SPL
	Average	129 dB SPL	124 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	118 dB SPL	108 dB SPL
	Peak	121 dB SPL	115 dB SPL
	Average	110 dB SPL	105 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	69 dB	59 dB
	Peak	75 dB	70 dB
	Average	65 dB	59 dB
Telecoil output (Input 10 mA/m)	2500 Hz	110 dB SPL	100 dB SPL
	Peak	113 dB SPL	106 dB SPL
	Average	100 dB SPL	97 dB SPL
Frequency range		100 Hz - 7100 Hz	100 Hz - 6850 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	2.2%	2.1%
	800 Hz	0.7%	0.5%
	1600 Hz	0.2%	0.1%
Equivalent input noise		19 dB SPL	22 dB SPL
Battery drain (stand by)		0.8 mA	0.8 mA
Battery drain		0.8 mA	0.85 mA
Battery life / hours (Type 13 Zn-Air, 270 mAh)		330 (>265)	325 (>260)
Mobile phone immunity		IRIL: -11/-10 dB SPL	U-rating: M3 / T3

